

■ Features




- Double AC input voltage controlled by switch
- Protection: short-circuit, overload, overheat
- Natural air cooled
- LED power indicator
- 100% full-load aged
- Idle power < 0.8W
- Holds on 300 VAC surge for 5 sec.
- Working temperature up to 60°C
- 5G vibration tested
- High efficiency, long life span, and high reliability
- 2 years warranty

Specifications

Product No.		S-150-12	S-150-24				
Output	DC voltage	12V	24V				
	Capacity of current	12.5A	6.3A				
	Range of current	0-12.5A	0-6.3A				
	Power	150W	150W				
	Noise max. ²	150mVp-p	240mVp-p				
	Voltage adjustment	10.8-	22-27.6V				
	Voltage accuracy ³	± 1%	± 1%				
	Linear Adjustment ⁴	± 0.5%	± 0.5%				
	Load adjustment ⁵	± 0.5%	± 0.5%				
	Start and rise time	1000ms, 30ms/230VAC 1000ms, 30ms/110V					
Hold time (Typ)	50ms/230VAC 10ms/115AC						
Input	Voltage range	AC 110V ± 15%/AC 220 ± 15% 通过开关切换					
	Frequency range	50HZ/60HZ					
	Efficiency (Typ)	80%	81%	82%	82%		
	AC current (Typ)	2.8A/110V 1.4A/220V					
	Surge current (Typ)	Cold start: 65A/230VAC					
	Current leak	<2mA/240VAC					
Protection	Overload	Greater than 105% of capacity Protection mode: hiccup, automatic restoration after abnormity removed					
	Overvoltage						
	Overheat						
Environment	Working temp.	-20~+60℃ (see tenuation curve)					
	Working humidity	20~90% RH, without condense					
	Storage temp & hmdty	-40~+80℃					
	Temp. coefficient	±0.03%/℃ (0~50℃)					
	Vibration proof	10~500Hz, 5G 10min / cycle, X、Y、Z axes 60 min each					
Safety reg. & EMC	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)					
	Voltage proof	I/P-0:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	insulation resistance	I/P-O/P, I/P-FG, O/P-FG:100M 0hms/500VDC/25℃/70% RH					
	EMC irradiation	EN 55015:2006;EN61000-3-2:1995+A2:2005					
	EMC disturbance proof	EN 61000-3-2:2006;					
	Dimensions	199*98*42mm(L*W*H)					
	Packing	0.55kg/PCS;28PCS/16kg					
Notes:	1. Unless otherwise stated, all data are taken under 230VAC input, rated load and 25℃ environment temp. 2.Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1 μF and a 47 μF capacitor. 3.Accuracy: including preset errors, linear adjustment rate and load adjustment rate. 4.Linear adjustment: taken under rated load from low voltage to high voltage. 5.Load adjustment: taken under 0~100% of rated load. 6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments						

150W Standard single output


■Appearance

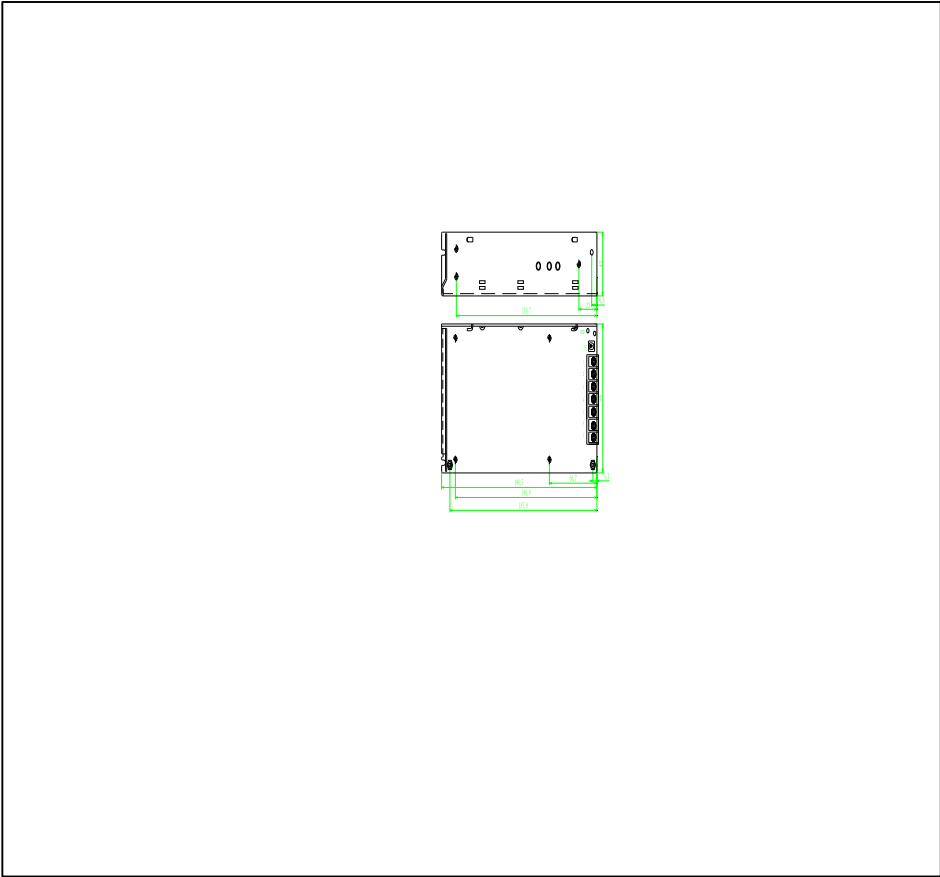


Terminal foot defir

Foot No.	Foot func
1	OUTPUT+
2	OUTPUT+
3	OUTPUT-
4	OUTPUT-
5	FG
6	AC/N
7	AC/L


■Frame diagram

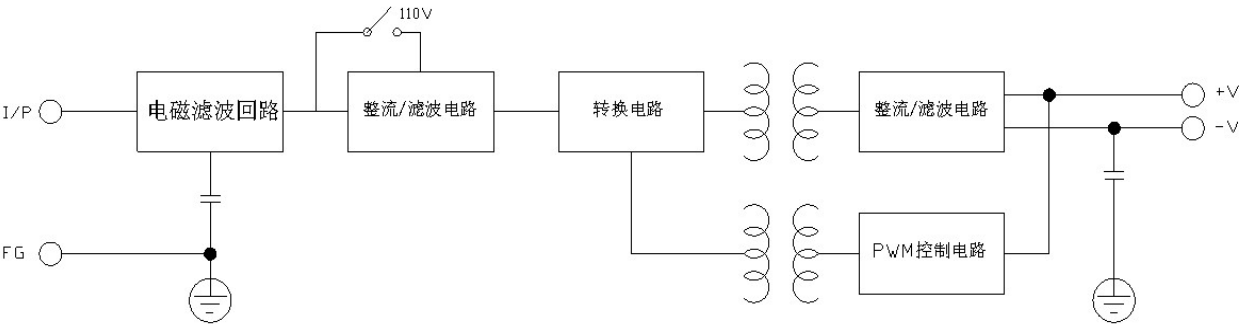

■Tenuation curve

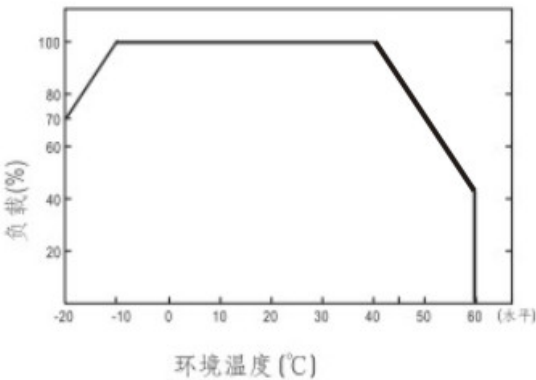

■Static property curve

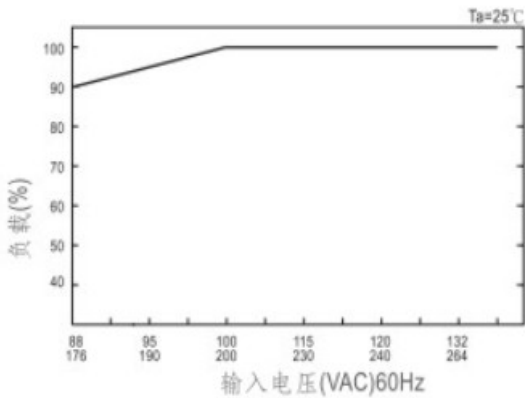

rit ion
tion