


# CT 263


250 Watt max | 4  $\Omega$  |  $\varnothing$  26 mm / 1"



Potenza nominale	<b>100 W</b>	Re	<b>3,25 <math>\Omega</math></b>	D	<b>32 mm</b>
Impedenza nominale	<b>4 <math>\Omega</math></b>	Fs	<b>1 kHz</b>	Vas	-
Sensibilità (1W/1m)	<b>93 dB</b>	Qms	<b>3,5</b>	Bxl	<b>2,5 Wb/m</b>
$\varnothing$ bobina mobile	<b>26 mm</b>	Qes	<b>1,14</b>	Xmax	-
Altezza traferro	<b>3 mm</b>	Qts	<b>0,86</b>	$\eta_o$	-
Fori di fissaggio	<b>4 <math>\varnothing</math> 5 / <math>\varnothing</math> 88</b>	Mms	<b>0,35 g</b>	Le	<b>0,03 mH</b>
Foro pannello	<b>75 mm</b>	Cms	-	Peso	<b>0,64 Kg</b>



48x30 cm

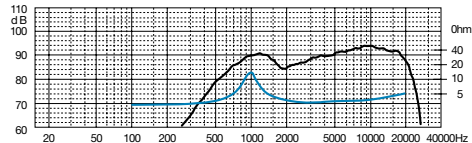

## TWEETER

Soft dome in seta, con ferrofluido  
Silk soft dome, ferrofluid cooled

